

# BMW R1100/1150GS FRONT WS-520-F STOCK MOUNTING BRACKET INSTALLATION INSTRUCTIONS



**TOOL NEEDED:** 4 MM ALLEN WRENCH

To prepare your new Sargent World Sport Seat for mounting, you will need to remove your stock mounting bracket from your current seat and mount it onto your new Sargent Seat.

This will only require about 5 minutes of your time and a 4 MM Allen wrench.

Remove the 4 bolts from the seat as shown in the diagram. In most cases the bolts and bushings will remain in place on the bracket when removed, but take care to insure none fall away when it is removed from the pan. A detailed close up of the order in which they should be reassembled is shown in the inset below. Now reassemble the mounting bracket onto your new Sargent Seat and snug the bolts secure.

Mount your new Sargent Seat to your motorcycle and your ready to ride!

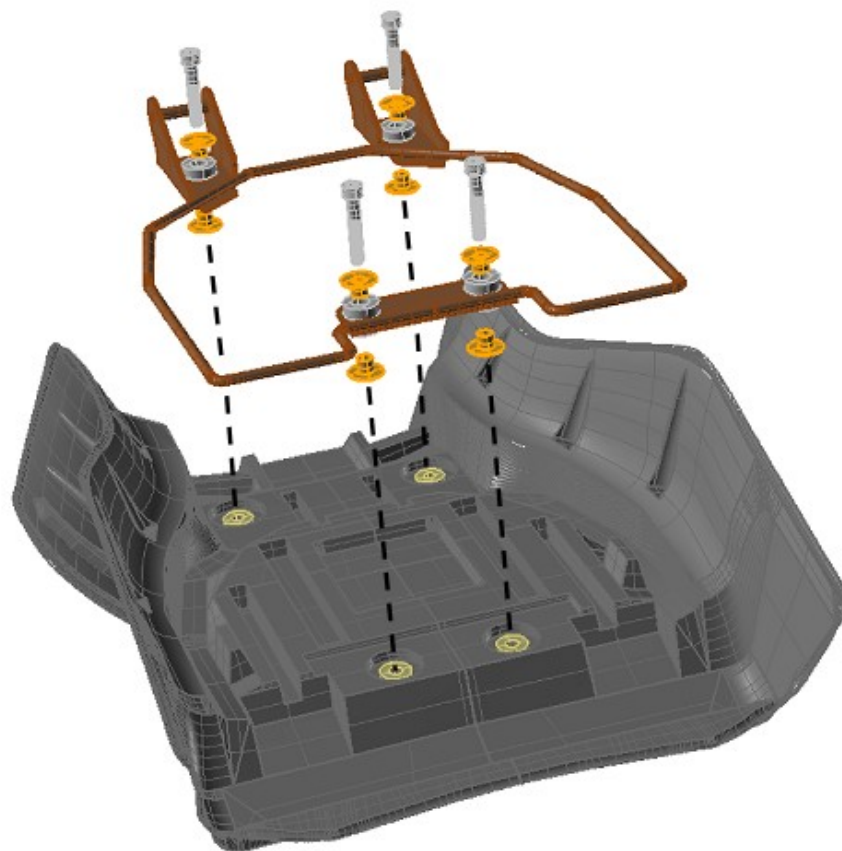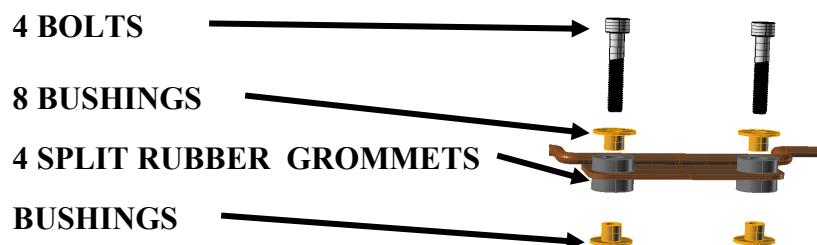

[www.SargentCycle.com](http://www.SargentCycle.com)

1-800-749-SEAT FAX 904-354-7979

**SARGENT**  
CYCLE PRODUCTS